

WALLSCOPE

Designed to be seen and felt.



Water
Proof



Termite
Proof



Fire
Resistant



AC 1
SCRATCH
RESISTANT



5 YEARS
WARRANTY*

*See dealer

About Us

Global Presence



EUROPE

ROW

- Warehouses
- Manufacturing Facility
- Corporate HQ/Marketing Offices
- Country Served

- **1 in 5** Towels;
1 in 9 Sheets in US
- **21,000+** Employees |
29% Women
- **21,000+ stores:** Highest distributed
Home Textile brand
- **4** Manufacturing Locations
- **47** Patented Technologies
- ESG (DJSI): Global Rank: **4**,
India Rank: **1**
- **Women Owned** Businesses
- Presence in **60+** countries



BATH



BED



FLOORING



ADVANCED TEXTILE

Our Product Categories



Innovative Solutions for Every Home

Transforming homes with comfort, quality, and love, from every household to every heart. With a deep commitment to touching the lives of every individual, we aim to bring comfort, quality, and innovation to homes worldwide. From cozy bedding to luxurious bath linens to aesthetically designed and technically sound flooring solutions, our products offer a sense of well-being and happiness. With a strong emphasis on customer centricity, innovation, and technology, we strive to make every house a home, nurturing relationships and leaving a lasting impression on every individual we serve.

Welspun Flooring is a fully integrated division of Welspun Living, specialising in both soft and hard flooring solutions. Our comprehensive range of flooring products includes carpet tiles, wall to wall, and artificial turf. With our unwavering focus, we ensure the manufacturing of top-quality flooring options to meet diverse customer needs.

We take pride in being the only company to produce both hard and soft flooring solutions in a single LEED-certified plant. Our product range offers hassle-free installation within a day*. Located in Telangana, our fully integrated Greenfield facility boasts an annual capacity of 27 million sq mt, serving the home, hospitality, and commercial sectors.



Promoting Sustainable Living

At Welspun Living, our vision is to harmoniously blend all elements of the biosphere and empower individuals to reimagine their lives through sustainable growth.

We strive to achieve this by seamlessly integrating sustainable practices into our operations, systems, and processes, ensuring that we stay in equilibrium with the triple bottom line.

- **#1** Home Textiles supplier to the USA, by Home Textiles Today (HTT)
- **Wel-Trak™** Traceability Solution with Blockchain: 1st in the industry
- Responsible water management and minimal environment impact with **Zero Liquid Discharge (ZLD)** facility

our Focus



Zero Waste

- Embrace a regenerative economy, making circularity a cornerstone of our operations
- Waste program demonstrating our commitment to waste reduction
- 99.96% of our waste is recycled or reused, successfully diverted from landfills



Reduce, Reuse, Re-Produce, and Recycle (4R)

- We prioritise the 4Rs - Reduce, Reuse, Re-Produce, and Recycle
- We have a closed-loop system that recycles and reuses all liquids, achieving zero liquid discharge



Zero Non-renewable Energy

- Commitment to 100% Renewable energy in operation by 2030
- Achieved 93% of Renewable energy in operation
- 100% of Steam and Electricity used from renewable sources



Zero Emission

- Regular energy and emissions assessments to ensure continuous improvement
- Achieved Zero Scope 2 emissions across operations
- Committed to achieving Net Zero emissions by 2040 across value chain

Installation Materials and Tools Needed



Installation Instructions

Before installing WALLSCAPE, it is recommended that you need to check with the building for any special requirements or restrictions. The consumer assumes all risks and liability associated with the construction and use of this product.

Safety

It is recommended to wear appropriate safety equipment to avoid any risk of injuries. Still, it is not limited to the following safety equipment when installing the WALLSCAPE: gloves, safety goggles, long sleeves & required PPEs.

Please Note:

DO NOT attempt installation by one person. It is must to carry out with the help of the installation team or the people who has expertise and authorized installation agency under Welspun.

Acclimation

- Acclimating at least 24 hours prior to installation is recommended
- Acclimating WALLSCAPE at the job site
- Acclimating WALLSCAPE will eliminate any unwanted shrinkage issues seen during and after installation
- Additionally, WALLSCAPE shall be acclimated on a flat, level, and solid surface prior to installation to ensure the panels remain flat and even, enabling proper installation

Please Note:

Always remember when allowing WALLSCAPE to acclimate at the job site, it is essential to put them on a flat and even surface. If placed on an uneven surface, WALLSCAPE could warp to the shape of the terrain.

Storage

- WALLSCAPE should be stored and transported in roll form.
- After un-packaging WALLSCAPE, It should always be stored on a flat solid surface before 24 hours of installation.

The Best surfaces for WALLSCAPE

- Drywall
- Plywood
- Concrete wall with smooth & flat surface
- Gypsum wall
- CSP wall (continuous sandwich Panel)

Please Note:

The surfaces should be flat, straight, and dry. It should not have any loose or damaged plaster, dust, water deposition /leakage and debris.

Installation Instructions

For a 1.5 mm Flexible WALLSCAPE, the installation method is different from rigid SPC click panels. Because the sheet is thin and flexible, proper substrate preparation, adhesive selection, and rolling are essential to prevent air bubbles, lifting, or telegraphing.

Installation of 1.5 mm Flexible WALLSCAPE.

1. PURPOSE

To ensure proper installation of 1.5 mm flexible WALLSCAPEs with excellent adhesion, no trapped air, and a smooth finished appearance.

2. ENVIRONMENTAL CONDITIONS

Item	Requirement
Relative Humidity	40-70 %
Panel Conditioning	Minimum 24 Hours

Store the panels flat in the installation room for at least 24 hours before installation.

3. WALL PREPARATION

The wall must be:

1. Dry
2. Smooth
3. Flat (maximum deviation 2 mm over 2 mm)
4. Dust free
5. Oil free
6. Paint firmly bonded
7. Moisture free

Remove:

1. Loose paint
2. Dust
3. Grease
4. Cement powder
5. Wallpaper
6. Old adhesive residue

Fill holes and sand the surface smooth.

4. LAYOUT

1. Mark the center line of the wall.
2. Dry-fit all panels.
3. Check colour matching.
4. Check pattern direction.
5. Measure corner cuts before applying adhesive.

5. ADHESIVE SELECTION

Recommended adhesive types:

- SR 505
- SR 998

Welspun recommends uses of the above adhesives are synthetic rubberized solvent based adhesive which should be compatible with PVC based product

Spread adhesive evenly using an A1 or A2 notched trowel.

Do not apply excessive adhesive.

Allow the adhesive to become tacky according to the manufacturer's instructions before placing the panel.



6. PANEL INSTALLATION

Position the panel carefully at the reference line.
Do not press the entire sheet immediately.

Instead:

- 1. Fix only the top edge.
- 2. Gradually lower the sheet.
- 3. Smooth the panel from the center toward the edges using a plastic smoothing tool or hand roller. This minimizes trapped air.

7. AIR REMOVAL (CRITICAL STEP)

After positioning the panel:

- Use a rubber hand roller.
- Roll from the center outward.
- Repeat in horizontal and vertical directions.

Then use heavy roller over the full panel surface.

8. ROLL

- 1. Top to bottom
- 2. Left to right
- 3. Diagonally

This ensures full adhesive transfer and removes any remaining air.

9. JOINT INSTALLATION

- Butt joints tightly.
- Do not overlap.
- Avoid excessive force.
- Remove any adhesive squeeze-out immediately.

10. CORNER INSTALLATION

For internal corners:

Slightly warm the panel if needed (typically 40–50°C with a heat gun, avoiding overheating). Press firmly into the corner.

For external corners:

Use corner trims or carefully form the panel with gentle heating if the product is designed for this application.

11. FINAL ROLLING

Within 15–20 minutes after installation:

- Re-roll the entire wall.
- Pay particular attention to:
 - 1. Edges
 - 2. Corners
 - 3. Joints
- Repeat rolling after approximately 30–60 minutes
- If recommended by the adhesive manufacturer.

12. INSPECTION

Check for:

- No air bubbles
- No lifted edges
- Full adhesive transfer
- Straight joints
- Uniform appearance
- No visible gaps

13. CURING

- Do not expose the installation to water for at least 24 hours.
- Avoid heavy impact during the adhesive curing period.
- Allow the adhesive to fully cure before placing fixtures or accessories against the wall, following the adhesive manufacturer's specified cure time



Common Installation Problems and Solutions

Problem	Cause	Solution
Air bubbles	Insufficient rolling	Roll from the center outward, then use a heavy roller
Edge lifting	Too little adhesive or poor tack	Apply adhesive evenly and wait for proper tack
Panel movement	Wet adhesive	Allow adhesive to become tacky before installation
Curling	Uneven adhesive or residual stress in panel	Ensure uniform adhesive coverage and use properly conditioned panels

BEST PRACTICES

- Condition both the panels and adhesive in the installation area for at least 24 hours.
- Always install on a clean, dry, and flat substrate.
- Avoid stretching the panel during installation.
- Use a heavy roller to maximize adhesive transfer.
- Inspect and re-roll edges before the adhesive fully sets.



DIMENSIONS OF DESIGN

Walls are no longer boundaries; they are opportunities to define mood, depth and identity. Wallscape transforms ordinary surfaces into immersive experiences through carefully curated textures inspired by nature.

From timeless marble and authentic stone to warm wood finishes, every design is created to bring lasting elegance, seamless continuity and contemporary character into residential and commercial interiors alike.





WALLSCOPE

Introducing Wallscape, a new dimension in architectural surfaces where walls become expressions of design. Inspired by the timeless beauty of marble, stone and wood, Wallscape transforms interiors with seamless finishes, immersive textures and exceptional performance.

Engineered for versatility across walls, ceilings, furniture and partitions, every surface is designed to create cohesive spaces that are as durable as they are beautiful.

Redefine every wall. Reimagine every space.

Application Areas



KITCHEN



BEDROOM



RECEPTION



LOBBY



CAFETERIA



CLINIC



LIVING ROOM



HOTEL ROOM



MEETING ROOM



RETAIL SHOP



LIBRARY



CLASSROOM

Application Focus



WALLS



FURNITURE

WHY WALLSCOPE PRODUCTS ?

With Wallscope, elevate your home décor to a whole new aesthetic, allowing you to express your unique style in every space. Experience unparalleled versatility, enabling you to effortlessly upgrade your home with ease.


Thickness	1.5 mm
Wear Layer Thickness	0.1 mm
Sheet Size	3x10 ft

Parameters	WALLSCOPE	Laminate	Wallpaper
Anti-Fade	✓	✗	✗
Scratch Resistance	✓	✓	✗
No affect by changes in moisture & temperature	✓	✓	✗
Increase stability & durability	✓	✗	✗
Waterproof	✓	✓	✗*
Stain Resistant	✓	✓	✓
Flexibility	✓	✗	✓
Termite Proof	✓	✗	✓
Easy to Clean	✓	✓	✗
Fire Resistant	✓	✓	✗

*T&C Apply

Structure

Wallscope is the perfect choice for those who crave long-lasting durability, waterproofness, and resistance against shattering, scratches, and stains. It seamlessly combines the strength of polymer and stone with a flexi core, giving you the best of both worlds. With its versatile multi-laying patterns and multi-surface applicability, you can effortlessly achieve the desired look while relishing in its timeless beauty for years to come.

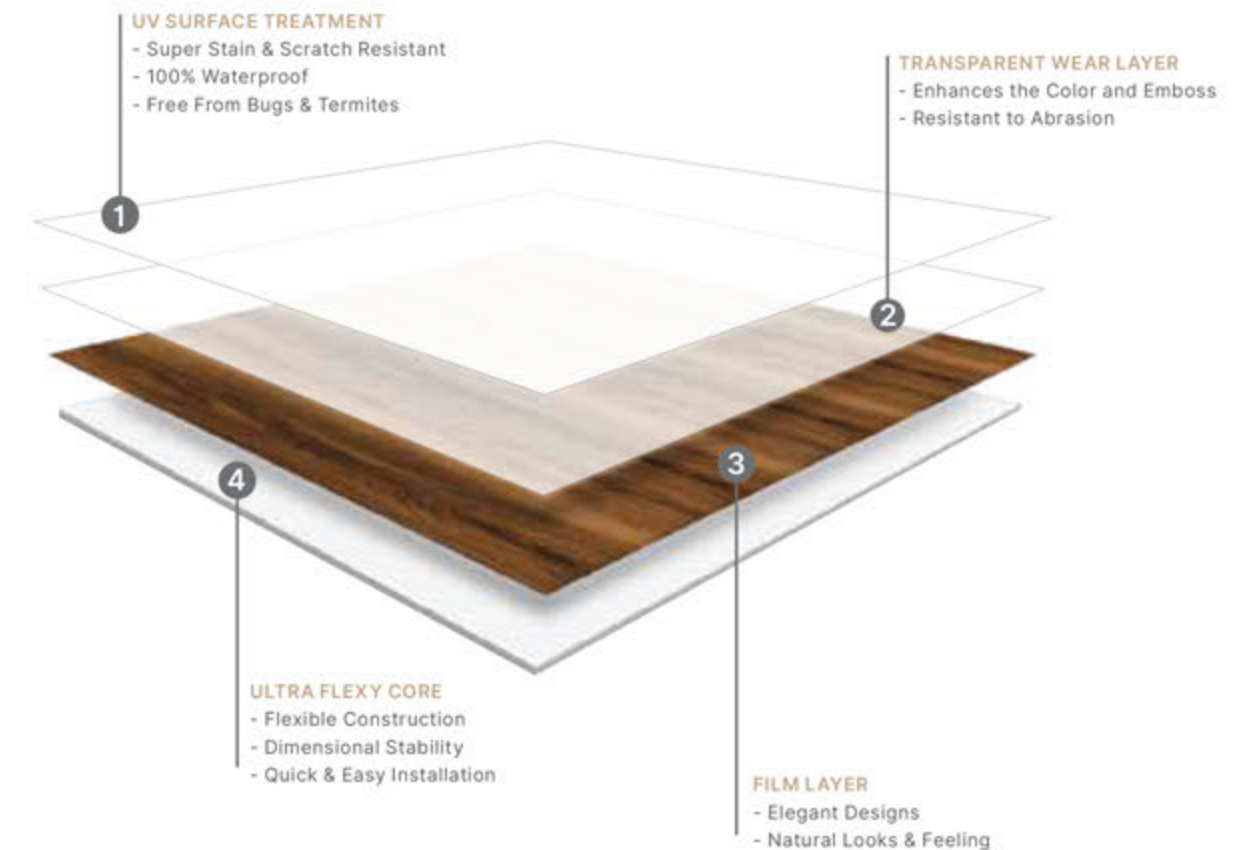

Features



COLOURWAYS



AOSTA MARBLE
HFW00001



CRYSTALLITE BLUE
HFW00002



ALBARIUM CAMEL
HFW00007



EPIC OCEAN
HFW00008



GRIGIO CARNICO
HFW00003




STATVARIO MARBLE
HFW00004




NAPOLI
HFW00009



STONE MOSAIC
HFW00013

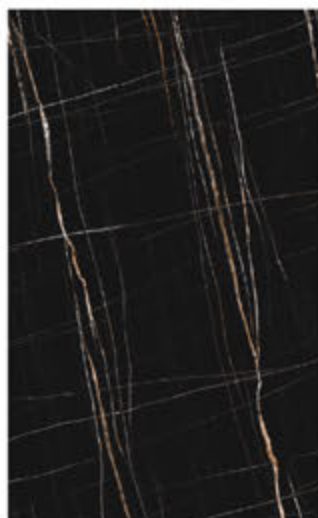

NERO LAURENT
MARBLE
HFW00005

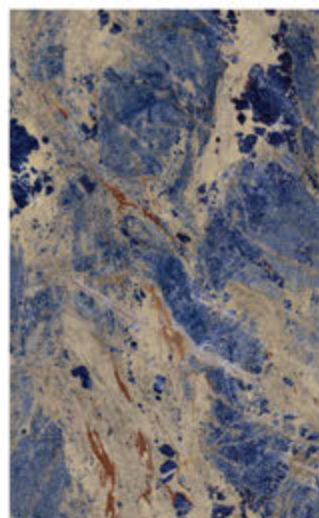

PALISSANDRO BLUE
HFW00006



AUTUMN BLISS
HFW00010



INTERLACE
HFW00012

TIMELESS MARBLE

Graceful veining, luxurious depth and timeless elegance recreate the enduring beauty of natural marble with remarkable realism and seamless continuity.





STATVARIO MARBLE | HFW00004

NAPOLI | HFW00009

LUXURY flows beyond ordinary surfaces.

This image is for illustration purposes only. The actual product appearance may vary.



CRYSTALLITE BLUE | HFW00002

Every conversation begins with **INSPIRED** surfaces.

This image is for illustration purposes only. The actual product appearance may vary.



AOSTA MARBLE | HFW00001

NERO LAURENT MARBLE | HFW00005

Balance comfort with enduring **ELEGANCE.**

This image is for illustration purposes only. The actual product appearance may vary.



PALISSANDRO BLUE | HFW00006

EPIC OCEAN | HFW00008

SERENITY shaped through natural textures.

This image is for illustration purposes only. The actual product appearance may vary.



GRIGIO CARNICO | HFW00003

MOMENTS unfold against timeless textures.

This image is for illustration purposes only. The actual product appearance may vary.



ELEVATE spaces through bold expression.



NERO LAURENT MARBLE | HFW00005

SCULPTED STONE

Earth-inspired textures capture the authenticity of natural stone, adding strength, character and contemporary sophistication to every interior surface.





DREAMS deserve inspiring surroundings.

NAPOLI | HFW00009

This image is for illustration purposes only. The actual product appearance may vary.



ALBARIUM CAMEL | HFW00007

EPIC OCEAN | HFW00008

Rest **EMBRACED** by thoughtful textures.

This image is for illustration purposes only. The actual product appearance may vary.



CAPTURE

attention without saying a word.



STONE MOSAIC | HFW00013

This image is for illustration purposes only. The actual product appearance may vary.

The background of the entire page is a close-up, high-resolution image of a wood grain. The grain patterns are organic and flowing, with varying shades of light tan, beige, and warm brown. A single, thin, dark vertical line runs down the center of the image, slightly to the right of the text area. The lighting is soft, highlighting the texture of the wood.

TIMBER STORIES

Rich grains and organic warmth celebrate timeless craftsmanship, bringing inviting comfort and refined natural beauty into modern living spaces.



AUTUMN BLISS | HFW00010

ORGANISE beautifully with seamless finishes.

This image is for illustration purposes only. The actual product appearance may vary.



FABRIC HARMONY

Soft textures and woven inspirations bring warmth, depth and understated elegance, creating inviting interiors where comfort and contemporary design exist in effortless harmony.



INTERLACE | HFW00012

BOUNDARIES DISAPPEAR through seamless surfaces.

This image is for illustration purposes only. The actual product appearance may vary.

Technical

Characteristics

TEST DESCRIPTION	TEST METHOD	SPECIFICATION
Dimensional Stability	ISO 23999	<0.4%
Curling	ISO 23999	<5mm
Peel Strength	Internal standard WJ / SP / J28	>50N / 50mm
Micro-Scratch Resistance (A & B)	EN 16094	MSR-B3 Rating in 160 Cycles
Scratch Resistance	EN 438-2	Grade : ≤ 2
Impact Resistance	EN 13329	Class - 23 (500 mm)
Gloss Value	ASTM D523	6 ± 2 GU at 60° angle
Phthalates	CPSC-CH-C1001-09.4 with GBS-MS Analysis	Not Detected
VOC	1) Volatile Organic Compound (VOC), 2) Formaldehyde, 3) 1,3 Butadiene. All the value are within the limit as per the ISO 16000-9:2006 Standard.	Pass
Surface Burning Characteristics	ASTM E84 - 23	Class B for flame spread index. Class A for smoke developed index.
Clean Ability-Stain Resistance	NALFA 3.4	Score - < 20
Wear Resistance	NALFA 3.7	AC1 - 500 Cycles (with 0.1 mm Wear Layer)
Thickness Swell	NALFA 3.2	0%
Flexibility of Resilient Flooring Materials	ASTM F137	Passes 25 mm Mandrel
Residual Indentation	ASTM F3261	0.01 mm

Product Specification

Thickness	1.5 mm
Wear Layer Thickness	0.1 mm
Sheet Size	3x10 ft

Trademarks & Technologies



StainProtect™

StainProtect™ layer is specially designed to offer superior stain resistance to keep your floor always clean and sparkling. Now go and make that splash!



AC 1 ScrapeGuard™

ScrapeGuard™ technology uses a layer with UV coating, that offers protection to the design underneath from scruffs and scratches meanwhile retaining the look and longevity of the tile. So you can say goodbye to the everyday scratches and scrapes.



GermiShield™

Welspun Flooring's Wallscape comes with the innovative GermiShield™ technology, which restricts the growth of harmful germs or moulds on the floor. Healthy homes begin with healthy floors.

Our Products are compliant with Global Standards



Attaining Gold certification denotes that a building has excelled in its sustainable design and operation, securing over 60% of the LEED points. This prestigious level is indicative of a project's comprehensive adoption of best practices in sustainability.



The Zero Waste Certification is a program that helps companies to minimize the amount of waste they send to the landfills.



The certification evaluates criteria such as energy efficiency, water conservation, waste reduction, and overall sustainability, leading to different rating levels from "certified" to "platinum plus"



(CRI) created Green Label Plus to identify carpets and adhesives that are tested by an independent, certified laboratory and meet stringent criteria for low chemical emissions.



GreenPro is a Type - 1 Ecolabel which enables the end users in the building sector and manufacturing industries to choose right products, materials and technologies for reducing the environment impacts during the construction, operation and maintenance of their buildings and factories.



The EPD provides information to buyers about a product's impact on the environment, such as global warming potential, smog creation, ozone depletion and water pollution.



Supply chain sustainability (SCS) is a holistic view of supply chain processes, logistics and technologies that affect the environmental, social, economic and legal aspects of a supply chain's components.



A global program by UL Solutions that certifies products for low chemical emissions, ensuring healthier indoor air quality and protecting human health



FloorScore® is the most recognized Indoor Air Quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.



Oeko-Tex certifies non-hazardous end-products and all of their components. Products that carry the Standard 100 label have been tested and proven free of harmful levels of toxic substances.



SGBC certification is developed by a broad group of industry experts and is widely recognised for its comprehensive coverage of sustainability criteria that has been developed by the building industry, for the building industry.



The OEKO-TEX® STeP certification stands for 'Sustainable Textile & Leather Production'. It stands for socially acceptable and safe working conditions, and sustainable production throughout the textile and leather industry's supply chain. OEKO-TEX® STeP certifies that the production sites and processes as well as employees' working conditions in the textile supply chain.



Transform any space with **WALLSC/PE**
- where versatility meets style in endless possibilities.



Our Wallscape range is uniquely flexible, allowing you to install them on walls without compromising on aesthetics. This flexibility opens up a world of design possibilities to elevate your interior design.

Features



Flexible



Scratch Resistant-AC 1



Fire Resistant



Stain Protect™



Five year warranty*



Weather Proof



Green Product



Water Proof




Termite Proof



Anti Fade



Dust Free Installation

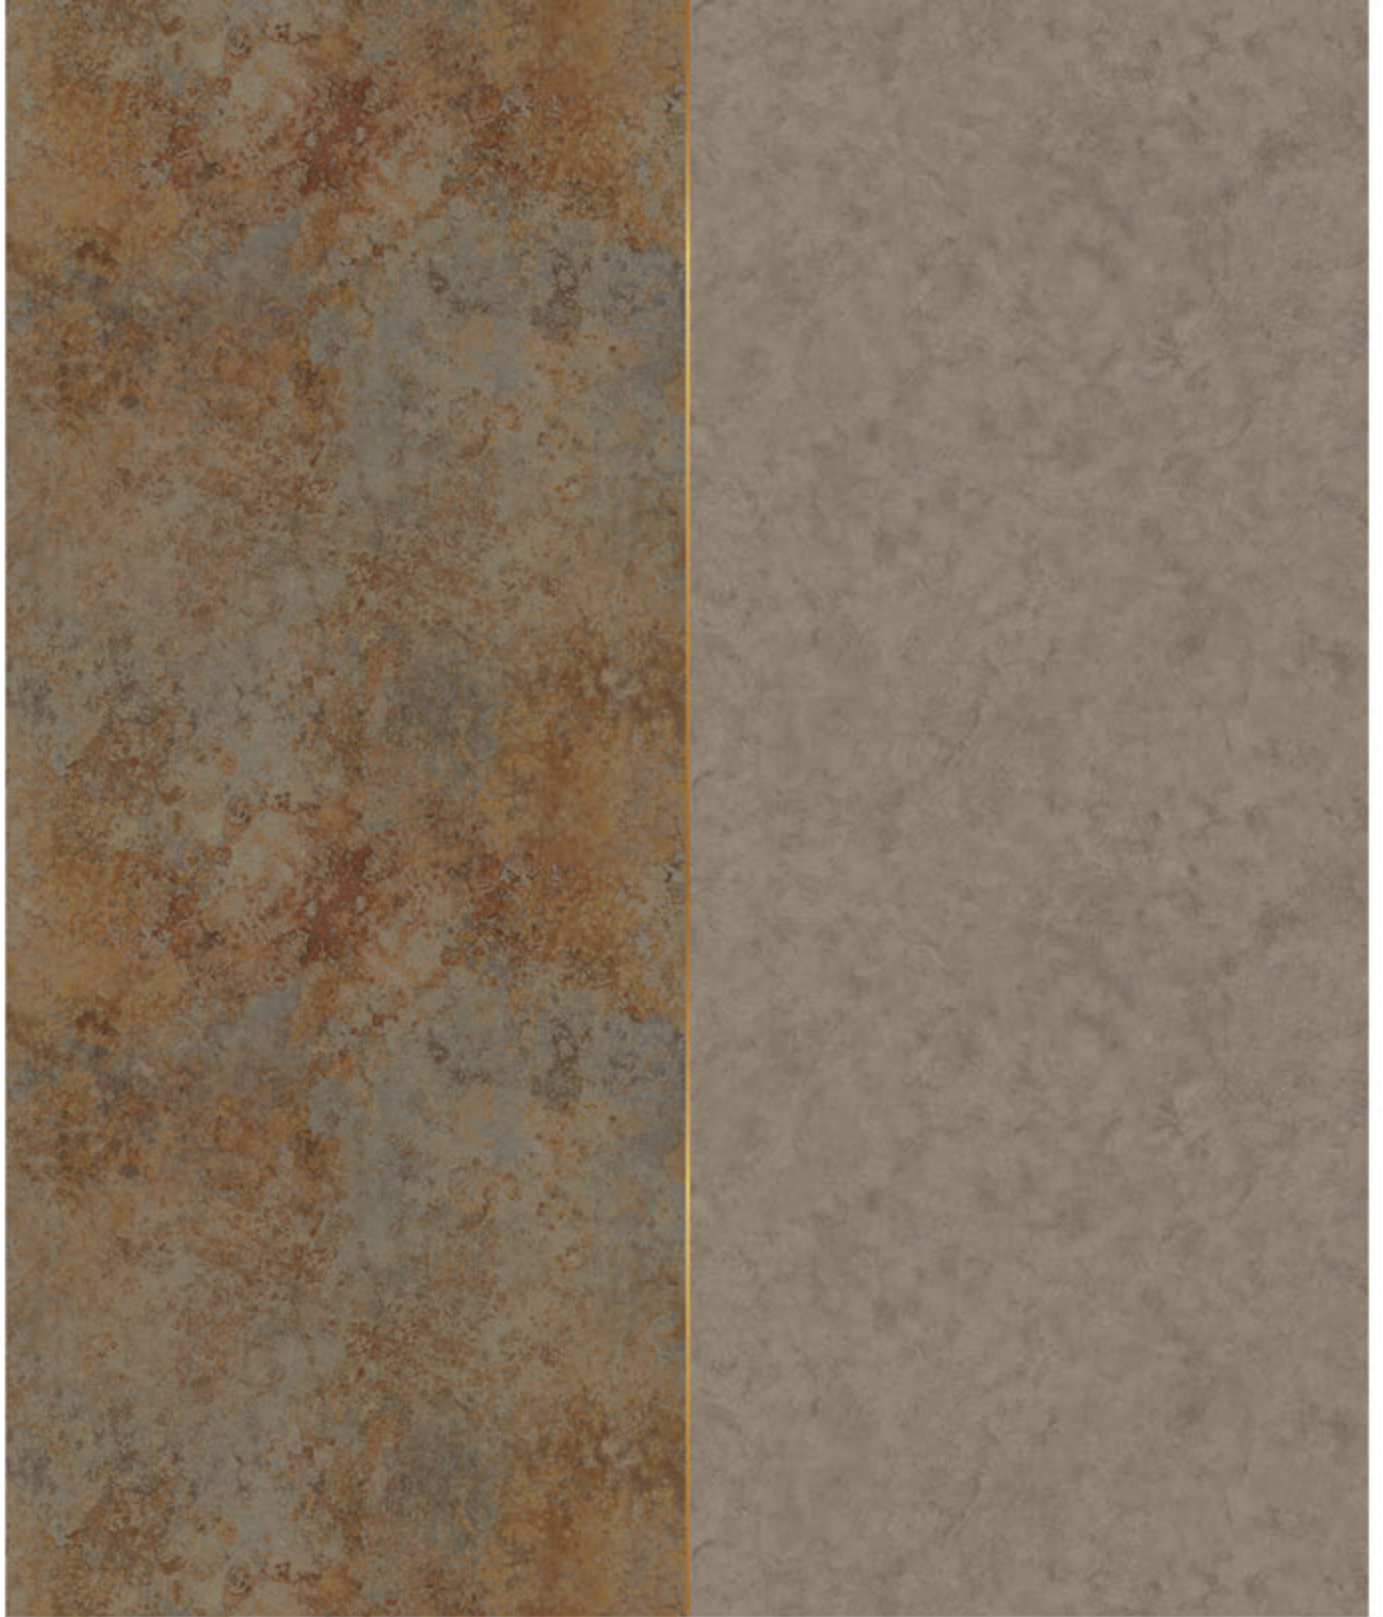

Address :

Welspun Global Brands Ltd, Survey No 190, Chandanvelly, Near Hythabad,
Shabad Mandal, Ranga Reddy District, Telangana 501503, India

1800-120-1161

India : contact_flooring@welspun.com

Global : global_saleswfl@welspun.com

www.welspunflooring.com



↓ E-LOOKBOOK